

The WM-5225 Wireless Microphone employs an electret condenser microphone capsule and is suitable for any applications. Thanks to the PLL-synthesizer system, 64 different operating frequencies are made available. A high output power ensures stable radio signal transmission.




Artikel nummer (SAP)WM-5225 G01
 Alternative products: WM-5265 B01,
 WM-5265 C01, WM-5265 C07, WM-5265
 D01, WM-5265 D04, WM-5265 G01,
 WM-5265 H01, WM-5270 B01, WM-5270
 C07, WM-5270 D01, WM-5270 D04,
 WM-5270 G01, WM-5270 H01, S4.04-HDX-
 EB, S4.10-HDX-EB, S5.3-HCX-C7, S5.3-HDX-
 C7

Specifications

Krachtbron (combined)	Accu
Batterijduur	10 h
Type	Electret condenser
Directiviteit	nier
Beschikbare frequentiebanden	606 – 636 MHz
Selectieve frequenties	64
Gelijktijdige kanalen	16
AF frequentiebereik	100 Hz - 15 kHz
RF uitgangsvermogen	10 mW
Maximale SPL	126 dB
Afmetingen (B x H x D)	x 231,5
Afmetingen (ø x D)	43,6 x 231,5 mm
Afwerking	Hars, zwart
Luchtvochtigheid	30% - 85%
Bedrijfstemperatuur	-10°C ... +50°C

Appearance

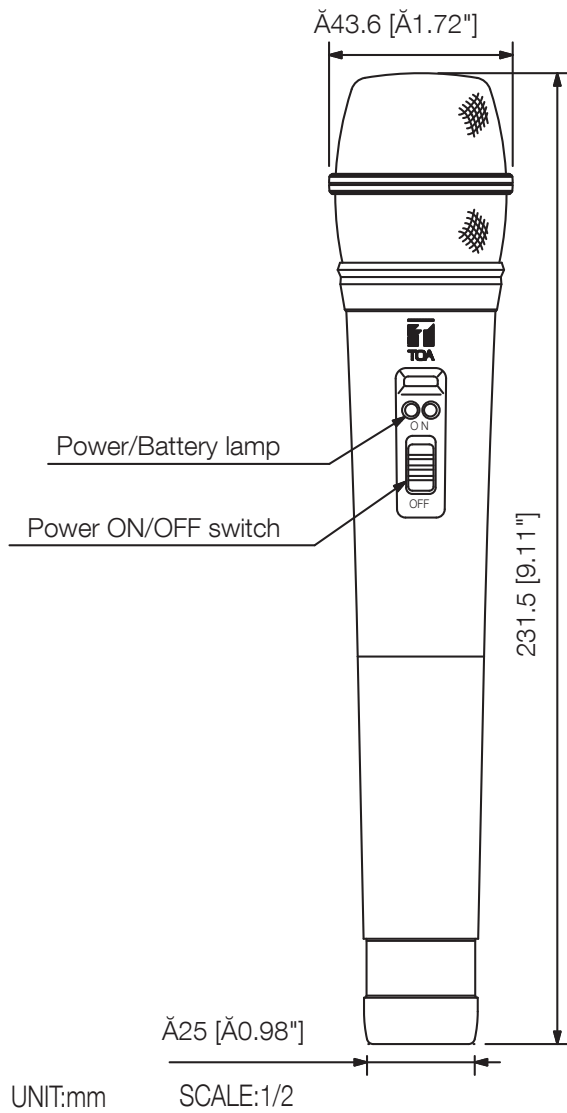

*

Type	Frequency Range
A01	692 - 722 MHz, UHF
B01, B02	722 - 752 MHz, UHF
C01 - C07	794 - 830 MHz, UHF
D01 - D05	830 - 865 MHz, UHF
E01	668 - 698 MHz, UHF
F01	636 - 666 MHz, UHF
G01, G02	606 - 636 MHz, UHF
H01	576 - 606 MHz, UHF
K01	925 - 937.5 MHz, UHF

